



# LIK0-SPACE® SYSTEM

MOBILE WALL | RAIL SYSTEM

One, two or maybe three rooms.  
Constructing and unfolding the sliding wall  
can be handled quickly and effortlessly  
by one person in a few minutes.

Unlimited **choice of surfaces, full  
and glazed panels** of sliding walls  
and **sliding-parking walls** tailored to the room

"Thanks to the rail system, changing the  
layout just takes a few minutes."

Orraine J. Williams | Head of R&D LIK0-S



## TECHNICAL SPECIFICATIONS

### BASIC INFORMATION:

Use: mobile wall | rail system  
Control: manual | handle fixation

### AIRBORNE SOUND INSULATION $R_w$ :


Full panel: 37, 42, 45, 47, 52, 54 dB

### STANDARD DIMENSIONS OF PANELS:


Thickness: 100 / 120 mm  
Width: 600 - 1,250 mm  
Height: max. 4,000 mm  
Door leaf: 900 x 2 000 mm

### MATERIAL SOLUTION:


Visible profiles: aluminium profiles (anodized / comaxite according to RAL)  
Full fill surface: laminated, veneer, varnished MDF, HPL  
Frame: combined aluminium + steel  
Rails: aluminium one-point or two-point  
Door hinges: TECTUS hidden hinges

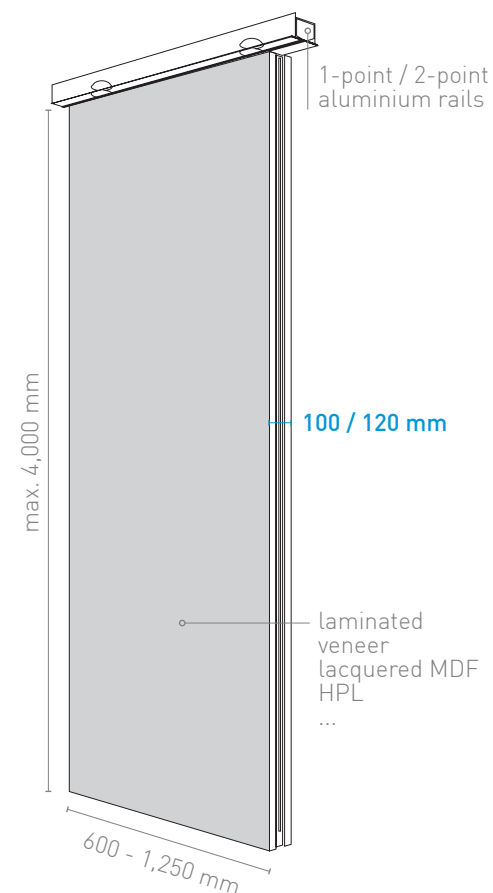


LIK0-Space  
100 mm

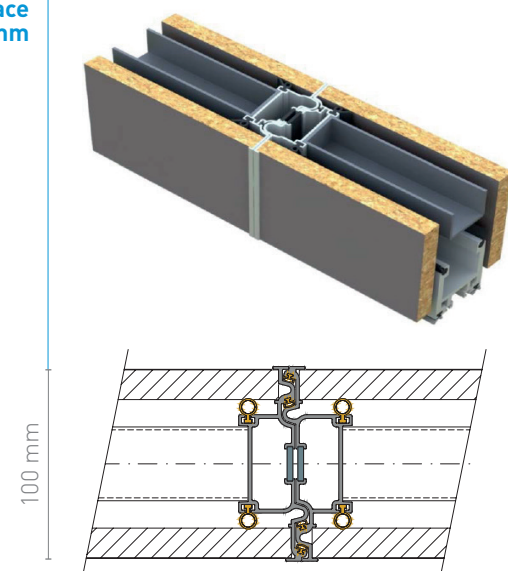

LIK0-Space  
120 mm

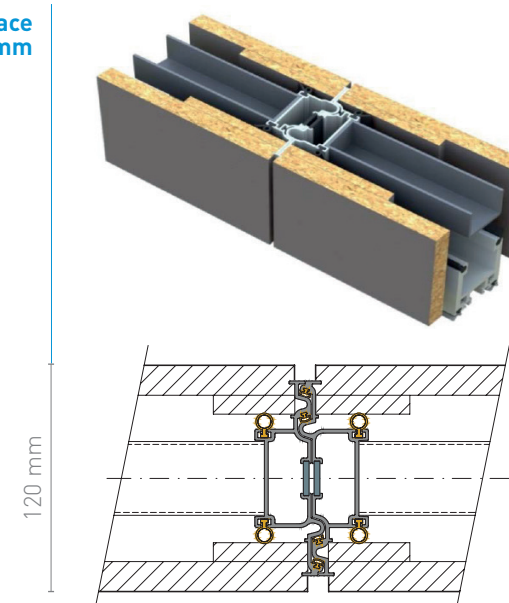



## TYPES OF PANELS

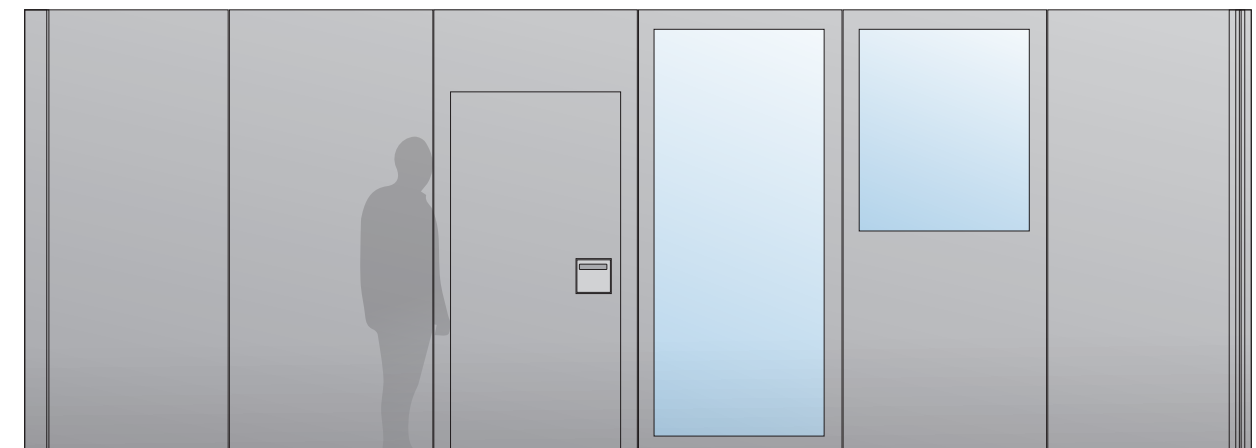

**T** telescopic      **S** standard      **D** one-leaf door      **G** glass panel full      **G** glass panel partly      **R** corner panel

## TYPES OF SLIDING-PARKING PANELS

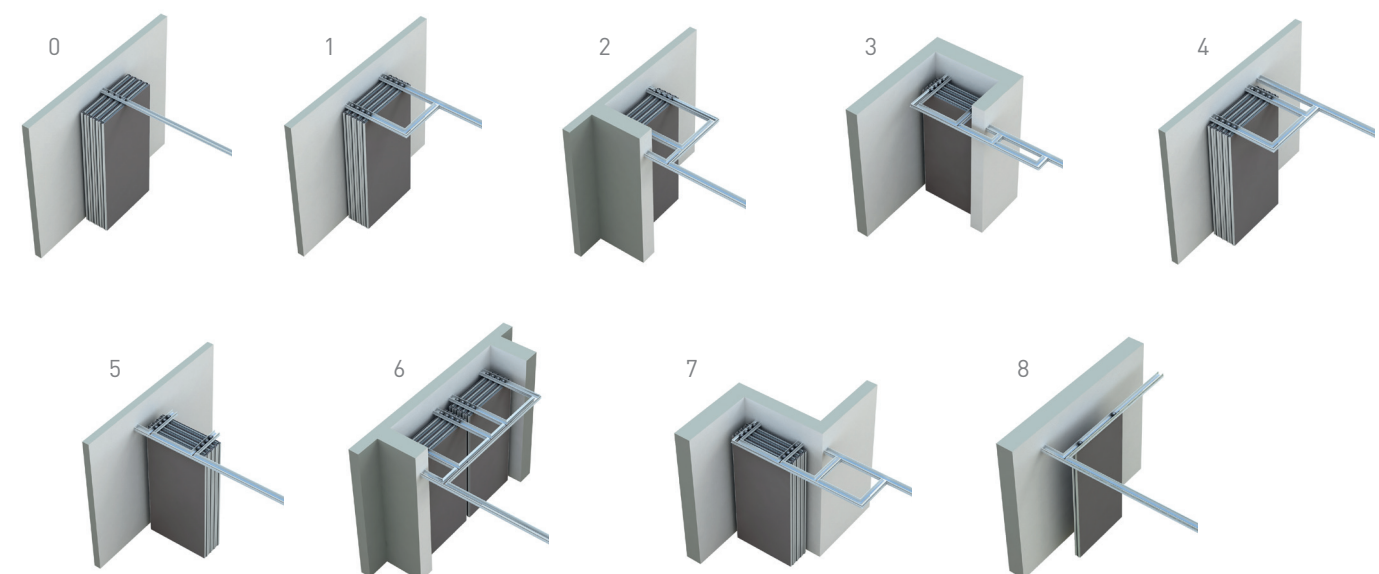

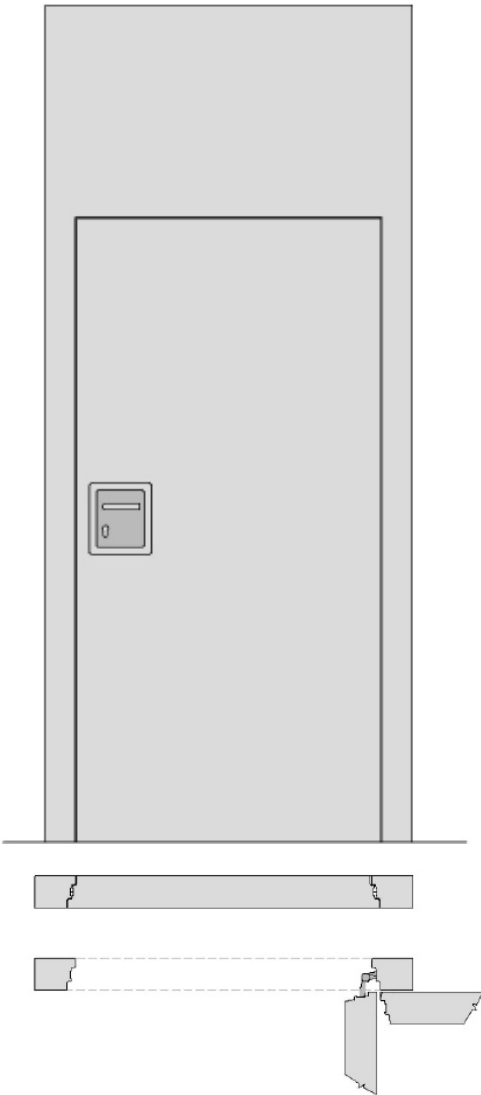


TECHNICAL SPECIFICATIONS

STANDARD DIMENSIONS:


|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Door panel width:                | 1,188 / 1,088 mm                            |
| Door panel height:               | min. 2,550 mm                               |
| Walk-through width of the door:  | 900 / 800 mm                                |
| Walk-through height of the door: | 2,000 mm                                    |
| Door leaf thickness:             | 100 / 120 mm                                |
| Material:                        | laminate, veneer, varnished MDF veneer, HPL |
| Door hinges:                     | TECTUS hidden hinges                        |



TWO-POINT HINGING  
LIKO-SPACE 100

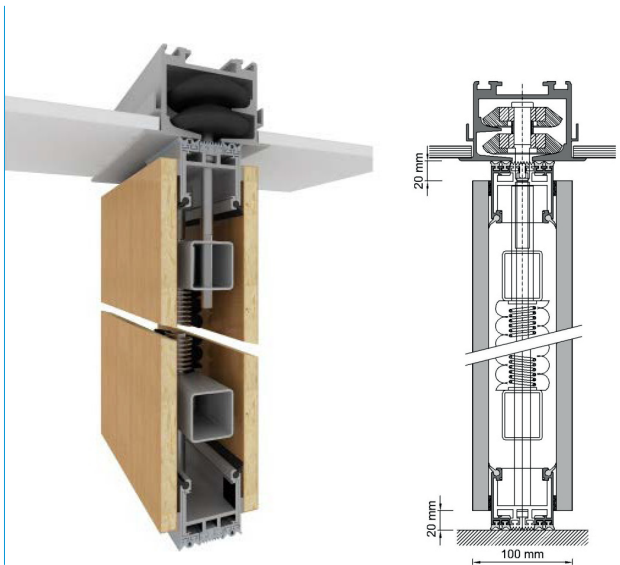

ONE-POINT HINGING  
LIKO-SPACE 100

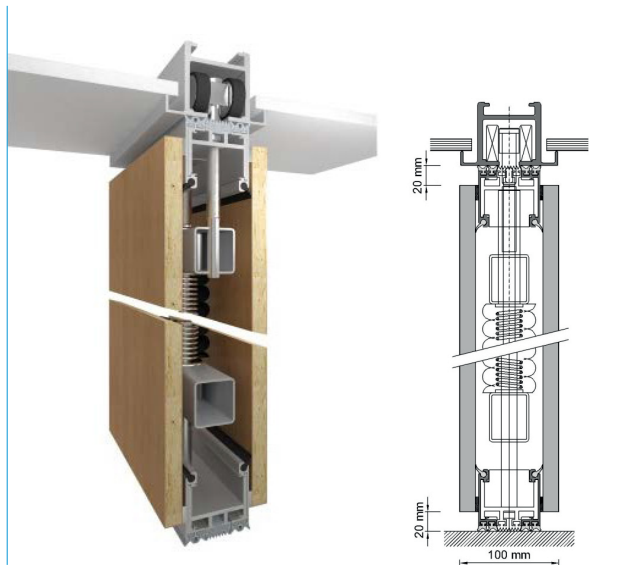

ACOUSTIC BARRIER

TYPE 01

Material:  
2 x 50 mm Techrock with al. foil

Airborne sound insulation Rw:  
**37 dB**



TYPE 02

Material:  
2 x SDK Knauf 12.5 mm

Rockton 60 mm

Airborne sound insulation Rw:  
**48 dB**




TYPE 03

Material:  
2 x SDK Knauf 12.5 mm

2 x Rockton 60 mm

Airborne sound insulation Rw:  
**59 dB**

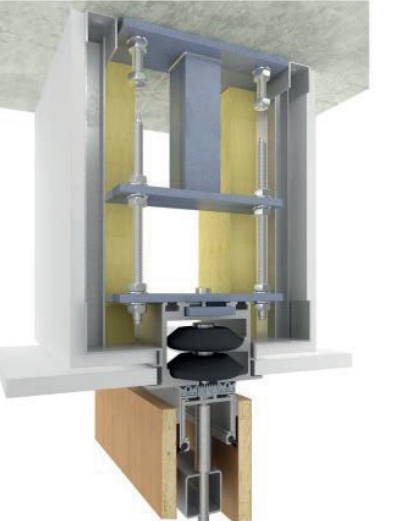



### Headquarters:

LIK0-S, a.s.  
U Splavu 1419  
684 01 Slavkov u Brna  
Czech Republic

+420 5 44 22 11 11 | [info@liko-s.com](mailto:info@liko-s.com)

[www.liko-s.com](http://www.liko-s.com)

Become one of our fans and be part of the story...



FACEBOOK



YOUTUBE



LINKEDIN